

General Description

OCH145 is a switched Hall-Effect IC, which is for contactless switching applications. The device includes an on-chip Hall voltage generator for magnetic sensing, an amplifier that amplifies the Hall voltage, a Schmitt trigger to provide switching hysteresis for noise rejection, and an open-collector output. The bandgap regulator allows a wide operating voltage range. OCH145 is rated for operating temperature range from -40°C to 150°C and voltage range from 3.8V to 18V. OCH145 are capable of continuous 25mA sinking out and maybe cycled as high as 50mA maximum.

Features


- Unipolar Hall Effect Switch Sensor
- Wide operating voltage range: 3.8V~18V
- Open Collector Pre-Driver
- Maximum output sink current: 50mA
- Chip Power Reverse-Connection Protection
- Operating Temperature: -40°C ~ $+150^{\circ}\text{C}$
- Small Size Package: SIP-3L, SSIP-3L

Applications

- Non-Contact Switch
- Automotive Ignition
- Braker ICs
- Position Control
- Revolution Detection
- Safe Alarm Device
- Textile Control System


Pin Configuration

(Top View)



Name	No.	Status	Description
Vcc	1	P	Input Power Supply
Gnd	2	P	Ground
Output	3	O	Output Stage of Open Collector

Functional Block Diagram

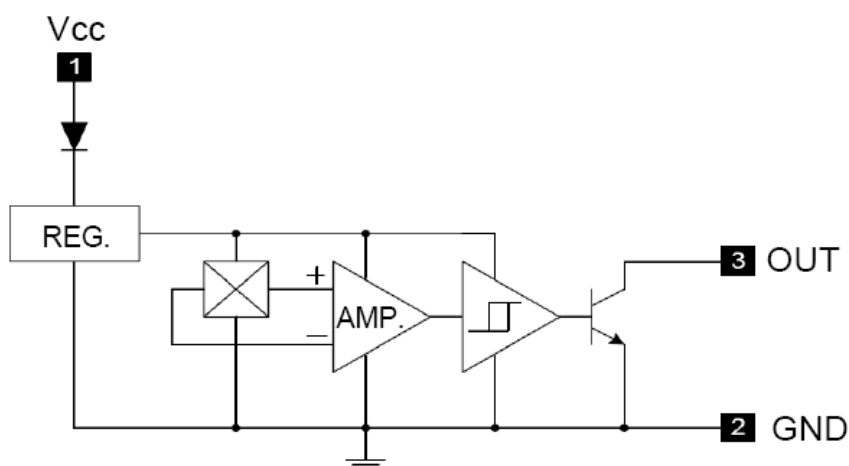

■ Absolute Maximum Ratings

Parameter	Symbol	Rating
Supply Voltage	VCC	-20 V to +18VDC
Voltage externally applied to output	Vout (off)	+20 VDC max, OFF condition only -0.5 V min., OFF or ON condition
Output "ON" Current	Io (sink)	50 mA
Power Dissipation	PD	450mW
Operation Temperature Range	Top	-40 to +150°C
Storage Temperature Range	Tst	-65 to +150°C
Magnetic Flux	B	No limit.

Note : Absolute Maximum Rating are those values beyond which the life of a device may be impaired.



■ Electrical Characteristics (Ta=25°C)

Symbol	Parameter	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Vcc	Supply Voltage	Operating	3.8		18	V
VO (SAT)	Output Saturation Voltage	Vcc = 12V, OUT "ON", Io = 25mA	-	150	400	mV
Icc	Supply Current	Vcc = 3.8V~18V, OUT "OFF"	-	1.8	10	mA
ILE	Output Leakage Current (Leakage into sensor output)	Released	-		10	μ A
Tr	Output Switching Time	Rise Time		145		nS
Tf		Fall Time		95		nS

■ Magnetic Characteristics (Ta=25°C, Vcc=5V)

Symbol	Parameter	MIN.	TYP.	MAX.	UNIT
Bop	Operation Point		-	200	Gauss
Brp	Release Point	20	-		Gauss
Bhy	Hysteresis		50		Gauss

■ Operating Characteristics

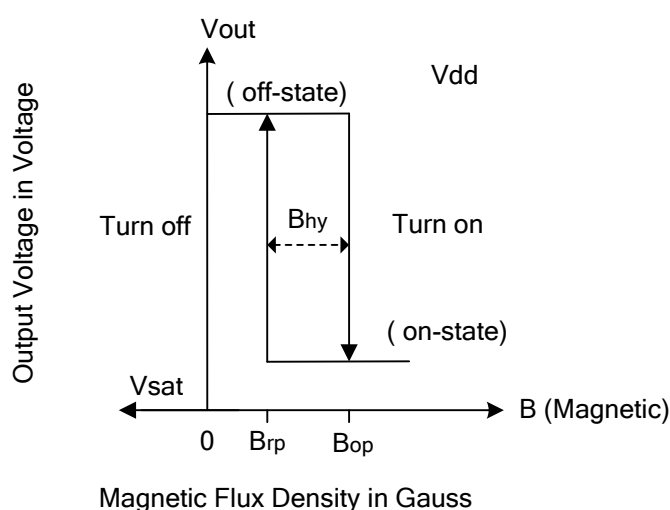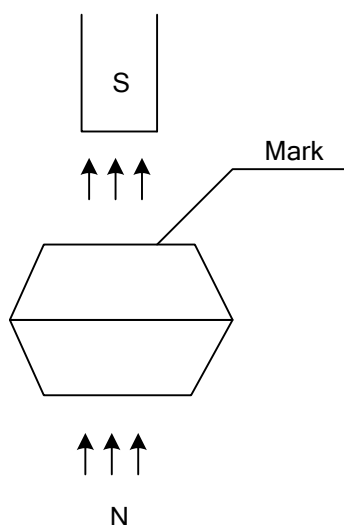

Test Circuits


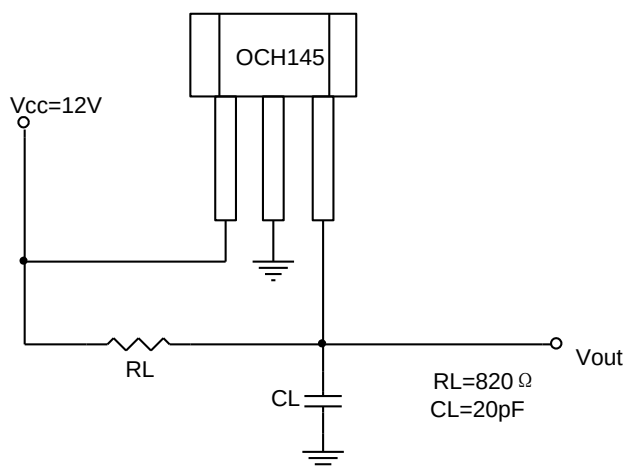


Fig1

Hall Sensor Location

The Fig2 is hall sensor location, where marks the IC number.

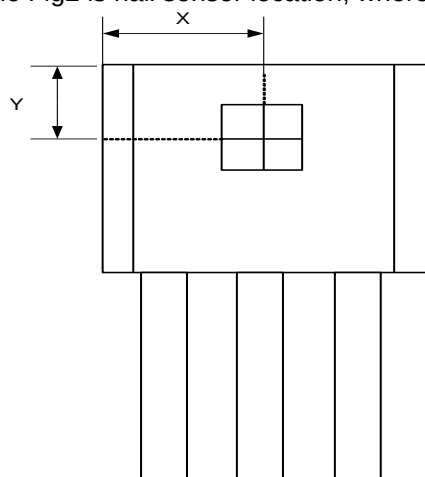

		Unit
X	2.00	mm
Y	1.15	mm

Fig2 OCH145 Hall Sensor Location


Ordering Information

OCH145XXX		
Package:	Packing:	Temperature Grade:
M: SIP-3L	Blank: Tube or Bluk	F: -40~150°C
SM:SSIP-3L	A: Tape & Reel	

Part Number	Package Type	Package Qty	Brp (Gauss)	Bop (Gauss)	Temperature	Eco Plan	Lead
OCH145AMF	SIP-3L	Bulk 1000pcs/bag	20 ~ 180	50 ~ 200	-40~150°C	RoHS	Cu
OCH145ASMAF	SSIP-3L	13-in reel 4000pcs/reel	20 ~ 180	50 ~ 200	-40~150°C	RoHS	Cu




■ Marking Information

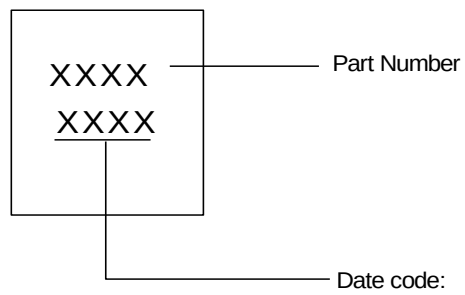

■ Package Information


1、SIP-3L

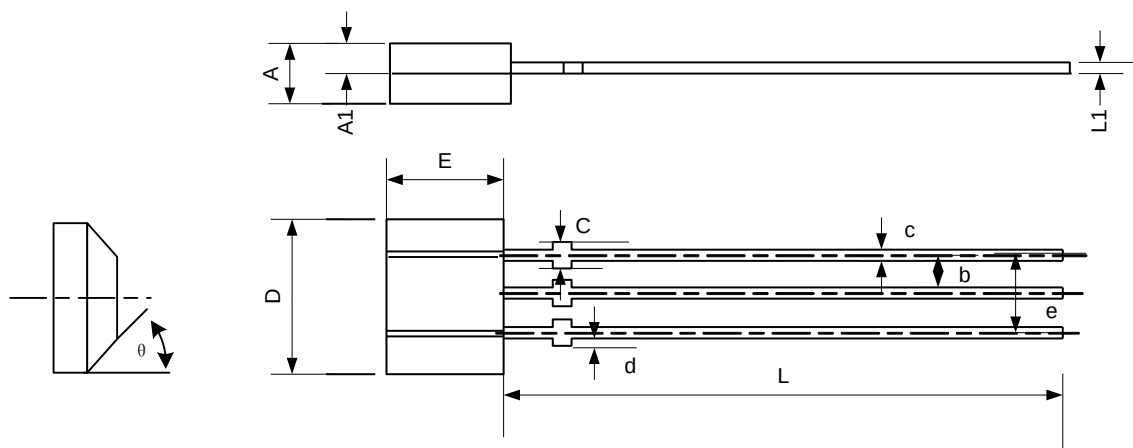

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.245	1.753	0.049	0.069
A1	0.750REF		0.030REF	
b	1.270REF		0.050REF	
C	0.406	0.508	0.016	0.020
c	0.330	0.432	0.013	0.017
D	3.960REF		0.156REF	
d		0.100		0.004
E	2.870	3.124	0.113	0.123
e	2.540REF		0.100REF	
L	13.60	15.60	0.535	0.614
L1	0.350	0.410	0.014	0.016
θ		45°		45°




2、SSIP-3L

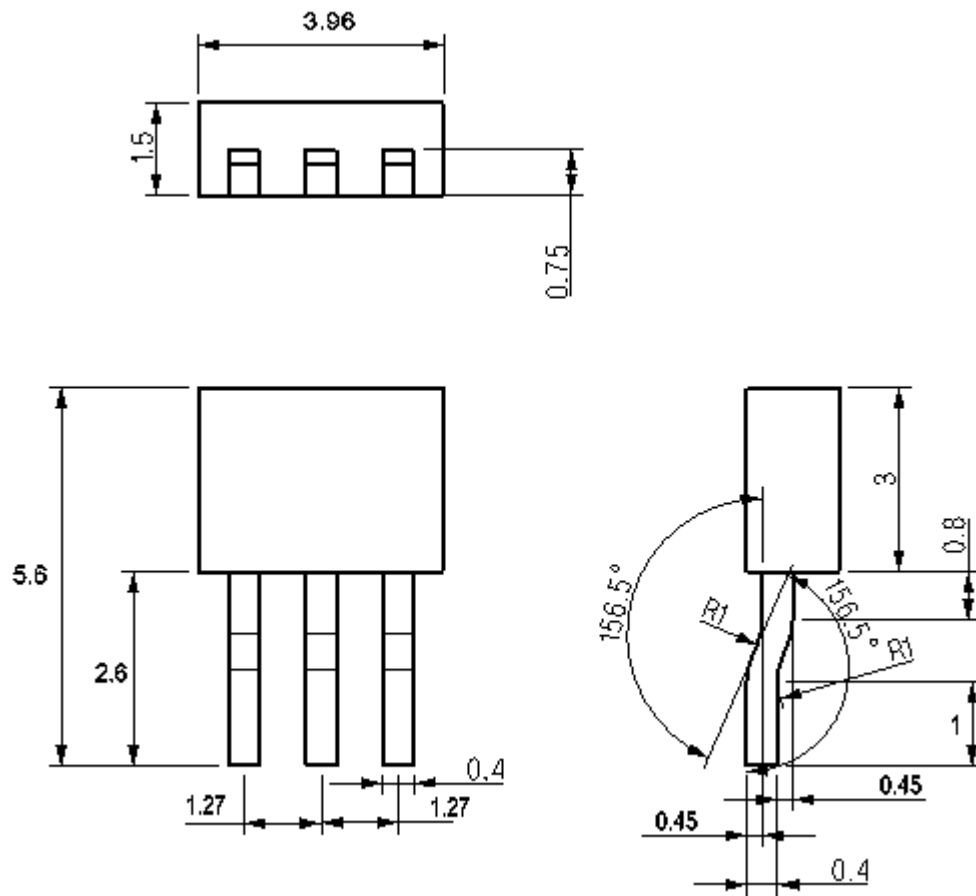

■ Packing Information

1), SSIP-3L

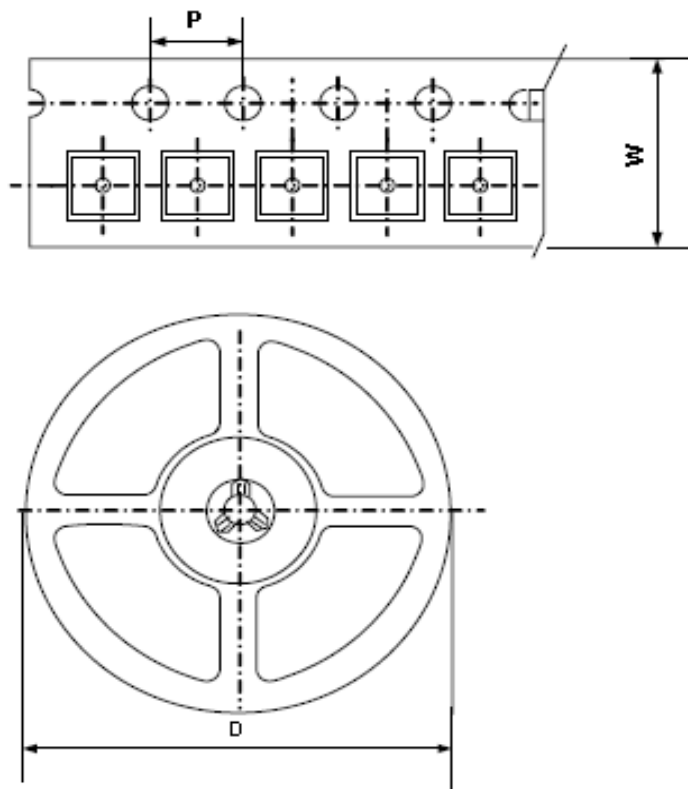

Package Type	Carrier Width(W)	Pitch(P)	Reel Size(D)	Packing Minimum
SSIP-3L	12±0.1mm	4.0±0.1mm	330±1mm	4000pcs

Note: Carrier Tape Dimension, Reel Size and Packing Minimum

2), SIP-3L

Bulk

1. Packing type: Bulk
2. Packing minimum: 1000pcs



Unipolar Hall Effect Digital Switches For High Temperature

IMPORTANT NOTICE

Orient-Chip Semiconductor Co., Ltd (OCS) and its subsidiaries reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. These separate provisions won't be provided.

